



XD-125

COMMERCIAL DEHUMIDIFIER



The XPOWER's XD-125 Commercial Dehumidifier is designed to maximize water extraction while combining the highest efficiency in performance and portability. A rugged and compact design allows units for easy storage. A highly durable housing construction withstands rough handling while its semi-pneumatic wheels make transport and maneuver on job sites a snap. With XD-125's unique and complete operating features, it is the perfect machine for not only water damage restoration jobs but also for multiple industrial applications where maximum performance in air drying is needed.


MODEL NO. XD-125 SPECIFICATIONS	
WATER REMOVAL CAPACITY	76 Pints/Day at AHAM (80°F, 60% RH)
	150 Pints/Day (90°F, 90% RH)
TYPE	Standard Refrigerant (R410A)
VOLTS / HERTZ	115V / 60Hz
POWER	7.3 Amps
PROCESS AIR	235 CFM
OPERATING RANGE	33° - 100°F (1° - 38°C)
UNIT / BOX WEIGHT	81 lbs. / 90 lbs.
UNIT DIMENSIONS (L x W x H)	20" x 19" x 32"
COMPRESSOR TYPE	High Efficiency Rotary Compressor
WATER PUMP OUT	Centrifugal
CONTROL PANEL	Advanced Recessed Digital Control Panel
DRAIN HOSE LENGTH	20 ft.
POWER CORD LENGTH	25 ft.
FILTER	High Airflow Filter (HAF)
HOUSING CONSTRUCTION	Roto-Mold Polyethylene
WHEELS	Shock Absorbing Semi-Pneumatic Tires
SAFETY CERTIFICATION	ETL/CETL Certified

XPOWER'S AIR DRYING AND AIR PURIFICATION SYSTEM

“Don't just dry it, purify it!”



INDOOR AIR MOVING, PURIFYING & DRYING SYSTEM
WORKING SCHEMATIC DIAGRAM

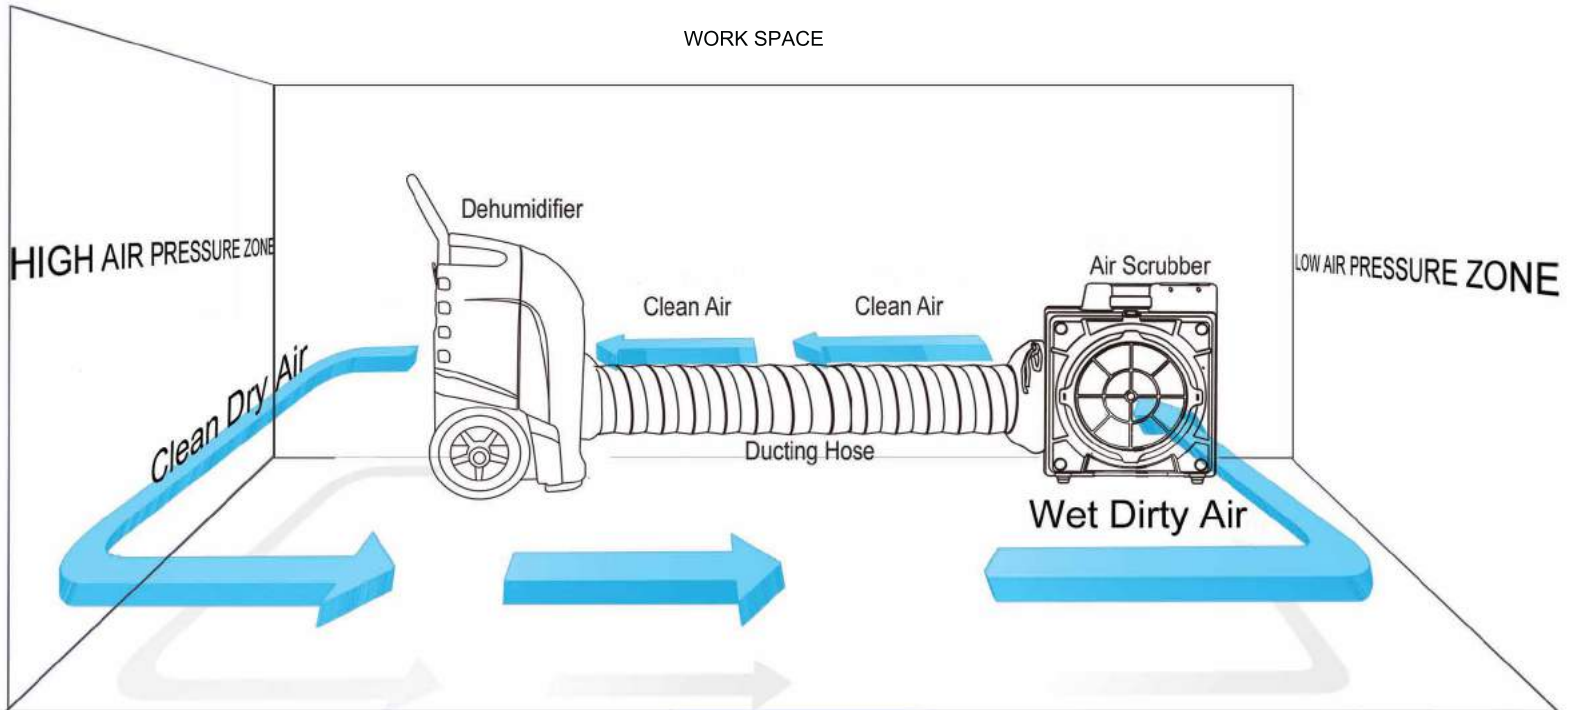

XPOWER's XD-125 is part of a revolutionary new Air Purification & Drying System which uses the combined power of the Air Scrubber and Dehumidifier to remove moisture and contaminants from the air!

X-3500 AIR SCRUBBER SPECIFICATIONS	
Volts/Hz	115V / 60Hz
Power	2.3A
Rated Airflow	550 CFM (High Speed)
Speed	Variable Speed Control
RPM (Low / High)	950 / 2400 RPM
Unit Weight	39.6 lbs.
Filter System	4-Stage Filter System
Power Cord Length	13 ft.
Safety Certification	ETL/CETL

